



CrossBar™ Flat Tile Mount

Installation Instructions

⚠ SAFETY PRECAUTIONS


Products should be installed and serviced by a qualified, licensed electrician in accordance with applicable local and national electrical safety code.

Never use currents or voltages that are not compatible.


Never install within 10 ft less from the nearest edge of a pool, spa, fountain, or similar location.

Never modify or take apart Kelvix components beyond instructions or the warranty will be void.


INSTALL VIDEO




- 1 | Press the flat tile mounts flush and perpendicular to the ceiling's T-bar.




- 2 | Tune the flat tile mounts counterclockwise against T-bar.




- 3 | Confirm that the flat tile mounts are parallel and secure to the T-bar.



- 4 | Remove adjacent ceiling tiles and connect fixture to power supply.

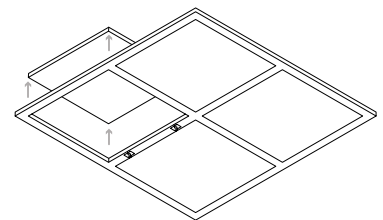

- 5 | Snap the Crossbar fixture to the flat tile mount.

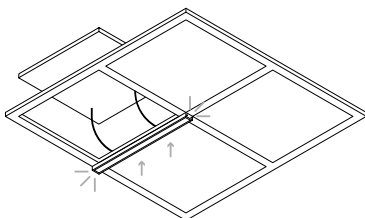

- 6 | Replace tile. Connect multiple fixtures in series using Y-split cable (CB-FML-Y2).

