



CrossBar™ Surface Mount

Installation Instructions

⚠ SAFETY PRECAUTIONS


Products should be installed and serviced by a qualified, licensed electrician in accordance with applicable local and national electrical safety code.

Never use currents or voltages that are not compatible.


Never install within 10 ft less from the nearest edge of a pool, spa, fountain, or similar location.

Never modify or take apart Kelvix components beyond instructions or the warranty will be void.


INSTALL VIDEO




- 1 | Mark desired location for surface mounting clips and 5/16" (8mm minimum power feed hole).

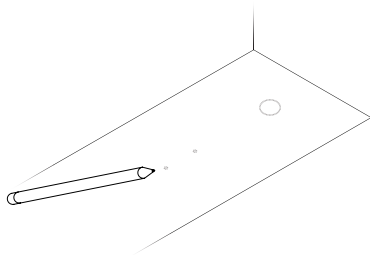

- 2 | Fasten the mounting clips to the desired location on the mounting surface.

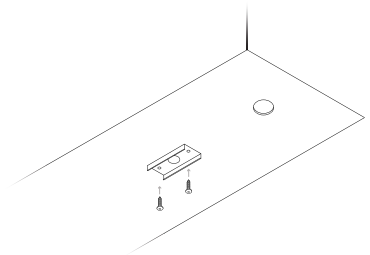

- 3 | Feed the power cable through the drilled hole and connect fixture to power supply. Connect multiple fixtures in series using Y-split cable (CB-FMC-Y2).

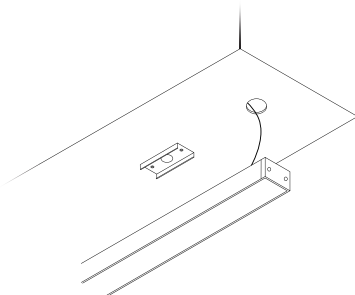

- 4 | Press the CrossBar fixture onto the mounting clips one side at a time.

