


I Features


- · Available In 78.74" (2m) Sections
- Extruded Aluminum Construction
- · Anodized Matte Finish
- Straight and Angled Connectors Available to Create Long, Continuous Runs
- Drywall Mud-in Mounting for a Seamless Recessed Look
- · Consult Factory for Custom Lengths and Finishes
- · Available In Various Finish Colors

I Dimensions

| Length | 78.74" (2m) |
|--------------------------------------|--------------|
| Width (External) | 1.38" (35mm) |
| Width (Internal) 0.74" (18.7m | |
| Height | 3.82" (97mm) |

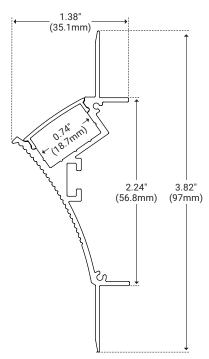

I Ordering Code Builder

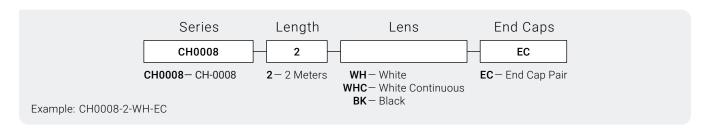



I Lens





| Unit Number | CH-LNS-AC-WH-2M | | Ordering Code WH | |
|--------------------|-----------------|-------------------------|------------------|--|
| Dimension | L 78.74" (2m) | W 0.87" (22.2mm) | H 0.20" (5.2mm) | |
| Light transmission | 70% | | | |



White Lens Continuous

| Unit Number | CH-LNS-AC-WH-CO | | Ordering Code WHC | |
|--------------------|-----------------|-------------------------|-------------------|--|
| Dimension | L Varies | W 0.87" (22.2mm) | H 0.20" (5.2mm) | |
| Light Transmission | 70% | | | |



Black Lens

| Unit Number | CH-LNS-AC-BK-2M | | Ordering Code BK | |
|--------------------|-----------------|-------------------------|------------------|--|
| Dimension | L 78.74" (2m) | W 0.87" (22.2mm) | H 0.20" (5.2mm) | |
| Light transmission | 30% | | | |



Disposable Cover

| Unit Number | CH-LNS-AC-DISP-2M | | INCLUDED | |
|-------------|--|------------------|-----------------|--|
| Dimension | L 78.74" (2m) | W 0.87" (22.2mm) | H 0.20" (5.2mm) | |
| Description | Used to protect interior LED area during installation. | | | |

I End Cap



End Cap Pair

| Unit Number | CH-EC-0008 | | Ordering Code EC |
|-------------|---------------|------------------|------------------|
| Dimension | L 0.08" (2mm) | W 1.39" (35.3mm) | H 2.24" (57.1mm) |

I Optional Accessories

| Product | Unit Number | Description |
|---------------------------|----------------|--|
| Straight Connector | CH-CON-01-180 | Secure two pieces of channel together to form a continuous run of light. |
| 90° Connector Horizontal | CH-CON-01-90H | Secure two pieces of channel together to form a 90° horizontal corner. |
| 90° Connector Vertical | CH-CON-01-90V | Secure two pieces of channel together to form a 90° vertical corner. |
| 120° Connector Horizontal | CH-CON-01-120H | Secure two pieces of channel together to form a 120° horizontal corner. |
| 135° Connector Horizontal | CH-CON-01-135H | Secure two pieces of channel together to form a 135° horizontal corner. |
| 135° Connector Vertical | CH-CON-01-135V | Secure two pieces of channel together to form a 135° vertical corner. |