

FIXTURE TYPE _____

PROJECT NAME _____

LOCATION _____



Performance 200 (Indoor)

LINEAR LED LIGHTING



I Description

The indoor Performance 200 Series is well suited for mid-level illumination needs, such as toe-kicks and handrails.


I Features

- 90+ CRI
- Dimmable
- 50,000 Hour Life
- 5-Year Warranty
- UL-Listed for Indoor Use
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies

I Series Spec

Series	PL
Input Voltage	24V DC
Watts per Foot	1.9W/ft
Beam Spread	120°
Max Run Length	Unlimited, power every 30ft
Cut Intervals	2.63" (66.7mm)
Dimensions	0.37" (10.0mm) × 0.06" (1.5mm)
CRI	90+
Diode	Epistar 2835
Dimming Protocol	PWM, Triac, 0-10V, DMX, Hi-lime

I Dimensions

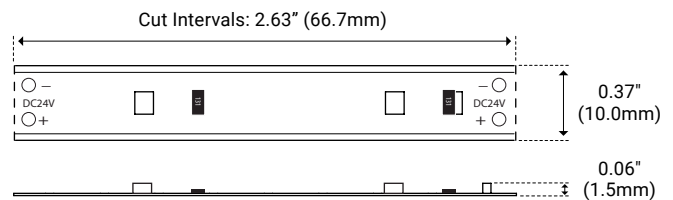

I Product Code Builder

Item	Voltage
<input type="text"/>	<input type="text" value="24V"/>
PL24K —Performance 200 2400k PL27K —Performance 200 2700k PL3K —Performance 200 3000k PL35K —Performance 200 3500k PL40K —Performance 200 4000k PL5K —Performance 200 5000k	24V —24V DC

Example: PL24K-24V

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 NO. 250.0



I Series Data

	PL24K	PL27K	PL3K	PL35K	PL40K	PL5K
Temp/Color (Kelvin)	2400K	2700K	3000K	3500K	4000K	5000K
Lumens (lm/ft)	106	148	169	176	184	195

I Power Chart

Length	Watts
1 ft	2.1
2 ft	5.2
3 ft	8.2
4 ft	9.6
5 ft	12.4
6 ft	14.4
7 ft	17.2
8 ft	18.7
9 ft	21.6
10 ft	23
11 ft	25.8
12 ft	26.9
13 ft	29.7
14 ft	31.5
15 ft	33.8
16 ft	35.1
17 ft	37.1
18 ft	38
19 ft	40.7
20 ft	41.9
21 ft	43.9
22 ft	46.6
23 ft	47.7
24 ft	49.9
25 ft	50.7
26 ft	52.4
27 ft	54.2
28 ft	55.6
29 ft	57.5
30 ft	57.8