

FIXTURE TYPE _____

PROJECT NAME _____

LOCATION _____



Slinx

HORIZONTAL BENDING LINEAR LED



I Features

- Horizontal Bending
- Clip Mounted
- 50,000 Hour Life
- UL-Listed for Indoor and Outdoor Use
- 90+ CRI
- Dimmable
- For Use with 24V Power Supplies

I Series Spec

Series	SX
Input Voltage	24V DC/Constant Voltage
Beam Spread	120°
Max Run Length	Unlimited, Power every 20ft
Cut Intervals	1.97" (50.0mm)
Dimensions	0.41" (10.5mm) × 0.16" (4.2mm)
End Cap Dimensions	0.47" (12.0mm) × 0.19" (5.0mm)
CRI	90+
Watts per Foot	2 W/ft @ Max Run Length
Diode	4020
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-4°F (-20°C) to 113°F (45°C)
Rating	IP65

I Series Data

Kelvin	2700K	3000K	3500K	4000K	5000K	6500K
Lumens/ft	306 lm/ft	315 lm/ft	323 lm/ft	340 lm/ft	340 lm/ft	340 lm/ft

I Product Code Builder

Item	Temp/Color	Output	Input Voltage
SX SX – Slinx	27K – 2700K 30K – 3000K 35K – 3500K 40K – 4000K 50K – 5000K 65K – 6500K	300 300 – 300+ lm/ft	24V 24V – 24V DC


Example: SX-27K-300-24V

Note: Not field cuttable. Please specify exact length to be factory produced.

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 NO. 250.0



I Dimensions

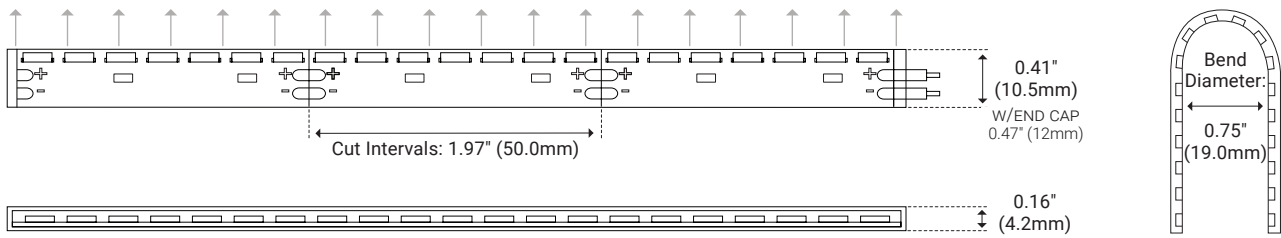

I Power Chart

Feet	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Watts	2.9	5.7	8.3	11.0	13.5	15.9	18.3	20.5	22.7	24.8	26.8	28.7	30.5	32.3	33.9	35.5	37.0	38.4	39.7	40.9

I Mounting Options


Clips



Specifications

Model	SX-CLP-10S-PAK-P
Material	Plastic
Length	1.00" (25.5mm)
Width	0.56" (14.9mm)
Height	0.56" (14.7mm)
Internal Width	0.125" (3.2mm)

Mounting Clip (Recommend 2 per Foot)
10 Clips per Pack.

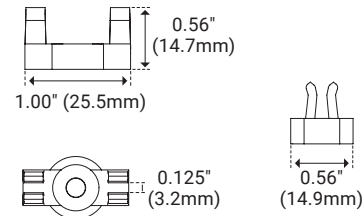

SnapTrax



Specifications

Model	SX-TRX-1F-PAK-P
Material	Plastic
Connected Length	2.18" (309.5mm)
Pivot Length	1.50" (38mm)
Width	0.56" (14.9mm)
Height	0.56" (14.7mm)
Internal Width	0.12" (3.2mm)

ClipTrack Comes in 1ft Sections (Consisting of 8 Pivot Clips) Clips Easily Attach or Detach to Create Any Length of Track.

