



QUIX™

LINKABLE LED FIXTURE | 120-277V | 0-10V DIMMING


Fixture Type: _____

Project: _____

Location: _____

PRODUCT FEATURES


- 0-10V Direct Control
- Universal 120-277V Input
- Easy Linking Connection
- Diode Free Illumination
- Indoor Use
- Up to 200W Maximum Run Length
- Supports Title 24 JA8-2016 Compliance
- Operating Temp 14°F (-10°C) – 122°F (50°C)

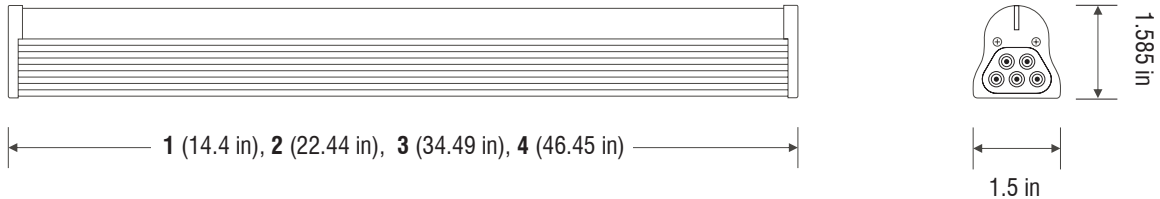


MODEL-LENGTH	INPUT VOLTAGE	WATTAGE	2700K	3000K	3500K	4000K	5000K	6000K	CRI
1-14.4"	120-277V AC	5W	468 lm	493 lm	516 lm	522 lm	543 lm	570 lm	90+
2-22.4"	120-277V AC	9W	909 lm	957 lm	1007 lm	987 lm	1026 lm	1078 lm	90+
3-34.49"	120-277V AC	13W	1446 lm	1554 lm	1601 lm	1621 lm	1686 lm	1770 lm	90+
4-46.45"	120-277V AC	18W	1898 lm	1956 lm	2028 lm	2019 lm	2100 lm	2205 lm	90+

ORDERING INFORMATION

Example: QX-550-30K-1-010V-120277-SV

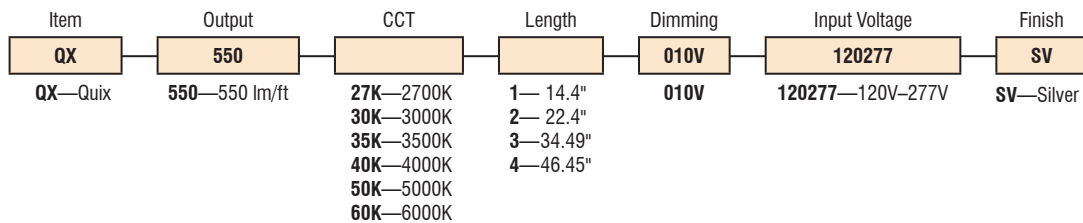

Conforms to ANSI/UL Standard 1598
 Certified to CAN/CSA Standard C22.2 No. 9





QUIX™ COMPONENTS




EASY LINKING CONNECTION

Multiple Quix fixtures can be connected in series.
No accessory required. Remove end cap and connect.
Do not exceed 200W.



MOUNTING CLIPS INCLUDED WITH FIXTURE

QUIX™ ACCESSORIES

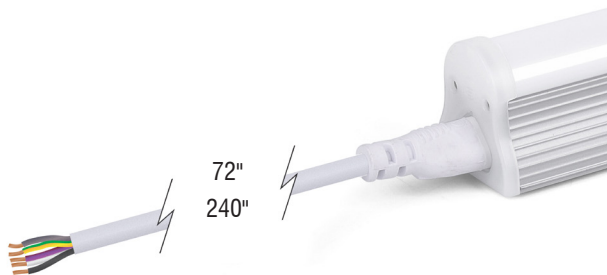

HARDWIRE POWER FEED

Connect Quix to AC line voltage power source within j-box. All Quix fixtures will come standard with a 6" hardwire power feed

QX-CM-PWR-HW-72-WH | 72" Power Feed

QX-CM-PWR-HW-240-WH | 240" Power Feed



CORD COUPLER

Connects multiple Quix fixtures in series allowing separation
Do not exceed 200W.

QX-CM-CC-6-WH | 6" Cord Coupler

QX-CM-CC-24-WH | 24" Cord Coupler

QX-CM-CC-72-WH | 72" Cord Coupler




QUIX™ PHOTOMETRICS

QX-550-35K-1-010V-120277-SV
14.4" LENGTH

CONE OF LIGHT

MTG HEIGHT	LIGHT LEVEL	BEAM DIAMETER
1.0 ft	138.2 fc	2.9 ft
3.0 ft	15.4 fc	8.7 ft
5.0 ft	5.5 fc	14.4 ft
10.0 ft	1.4 fc	28.9 ft
15.0 ft	.6 fc	43 ft

CANDELA POLAR PLOT

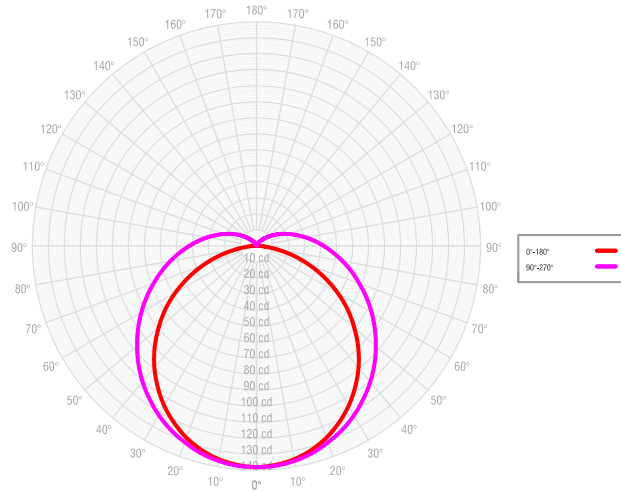


QX-550-35K-2-010V-120277-SV
22.4" LENGTH

CONE OF LIGHT

MTG HEIGHT	LIGHT LEVEL	BEAM DIAMETER
1.0 ft	266.1 fc	2.9 ft
3.0 ft	29.6 fc	8.6 ft
5.0 ft	10.6 fc	14.3 ft
10.0 ft	2.7 fc	28.7 ft
15.0 ft	1.2 fc	43.0 ft

CANDELA POLAR PLOT

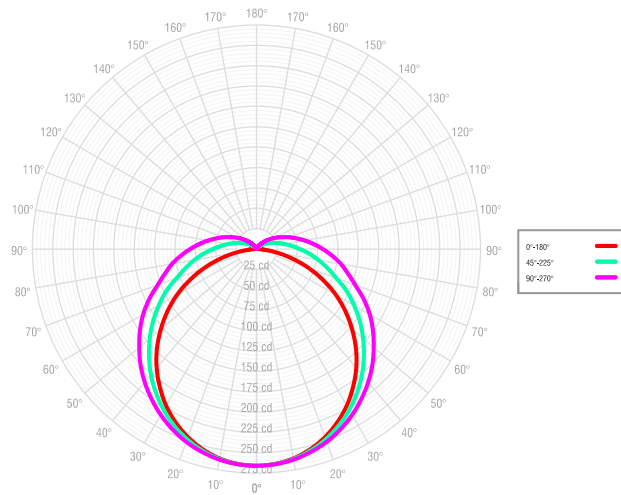




QUIX™ PHOTOMETRICS

QX-550-35K-3-010V-120277-SV
34.49" LENGTH

CONE OF LIGHT

MTG HEIGHT	LIGHT LEVEL	BEAM DIAMETER
1.0 ft	442.9 fc	2.7 ft
3.0 ft	49.2 fc	8.1 ft
5.0 ft	17.7 fc	13.5 ft
10.0 ft	4.4 fc	26.9 ft
15.0 ft	2.0 fc	40.4 ft

CANDELA POLAR PLOT

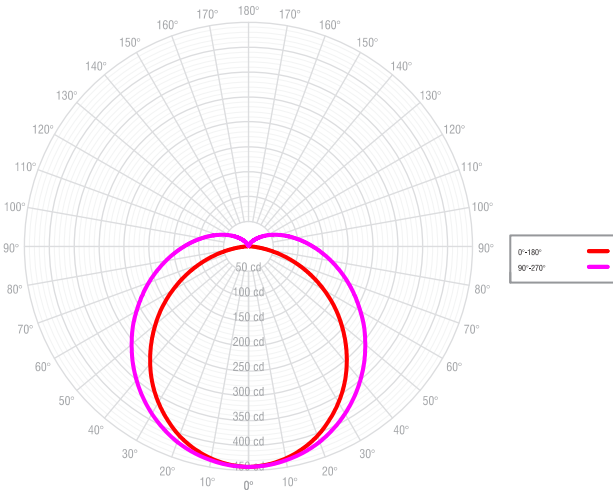

QX-550-35K-4-010V-120277-SV
46.45" LENGTH

CONE OF LIGHT

MTG HEIGHT	LIGHT LEVEL	BEAM DIAMETER
1.0 ft	552.9 fc	2.8 ft
3.0 ft	61.4 fc	8.3 ft
5.0 ft	22.1 fc	13.9 ft
10.0 ft	5.5 fc	27.8 ft
15.0 ft	2.5 fc	41.6 ft

CANDELA POLAR PLOT

