



COLOR TUNING (INDOOR)

CT-SERIES | 4-WIRE | DYNAMIC WHITE

LINEAR LED LIGHTING


Fixture Type: _____

Project: _____

Location: _____



Cut Intervals: 50mm (1-15/16")




PRODUCT FEATURES

- Ability to mix Kelvin temperatures
- 90+ CRI
- Dimmable
- 50,000 hour life
- 5-year warranty
- UL-listed for indoor
- 3M™ industrial adhesive backing
- For use with 24V power supplies

SPECIFICATIONS

Model	CT1865-24V (Indoor)
Input Voltage	24V DC / Constant Voltage
Watts per Foot	3.6W/ft @ Maximum Run Length
Kelvin Range	1800K-6500K
Lumens	Up to 410 lm/ft
Beam Spread	120°
Max Run Length	Unlimited, power every 20ft
Cut Intervals	1-15/16" (50mm)
Dimensions	1/2" (12mm) x 1/16" (1.2mm)
CRI	90+
Diode	Epistar 2016
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)

KELVIN COLOR TEMPERATURE SCALE

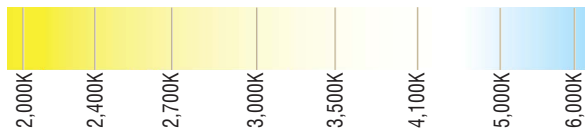

TOTAL WATTAGE USED AT EACH LENGTH

1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft	9ft	10ft	11ft	12ft	13ft	14ft	15ft	16ft	17ft	18ft	19ft	20ft
4.2	8.5	12.7	16.8	21	25.4	29.2	32.9	36.9	40.5	44.2	48	51.4	54.6	57.7	60.7	64.3	67	70.4	71.8

Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.0

