



FIELD CONNECTORS & SPLITTERS

FOR PJ, PL, PH INDOOR SERIES ONLY

Fixture Type: _____

Project: _____

Location: _____

WIRE LEAD CONNECTOR

This is an instant 6 foot snap-on power feed cable for connecting to your power supply.


Item #WL10-6 Wire Lead, 10mm, 6 foot length



CORNER CONNECTOR

This snap-on connector will connect two pieces of LED together but also provide separation so you can make it around corners or bridge gaps.


Item #CC10-2 Corner Coupler, 10mm, 3" length



JUMP COUPLER

This piece joins two pieces of LED with separation. Lengths include 6 inches, 12 inches, and 24 inches.

Item #JP10-6 Jump Coupler, 10mm, 6" length
Item #JP10-12 Jump Coupler, 10mm, 12" length
Item #JP10-24 Jump Coupler, 10mm, 24" length

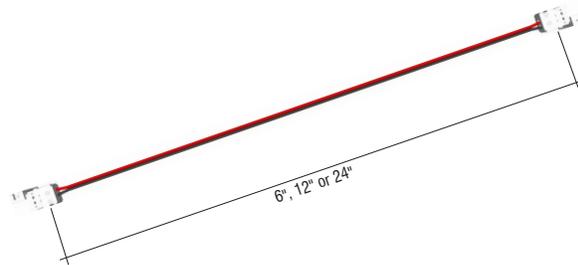

STRAIGHT COUPLER

This snap-on coupler is what you need to join two pieces of LED together.


Item #SC10 Straight Coupler, 10mm



PLUG-N-PLAY CONNECTOR

This piece will allow you to plug any piece of LED strip to a plug-in driver so you can plug-n-play.

Item #FDC-10 Female DC Connector, 10mm



Y-SPLITTERS

Used to connect a single plug-in power supply to multiple quick-connect LED leads.

Item #Y2 2-Way Splitter
Item #Y4 4-Way Splitter
Item #Y5 5-Way Splitter






FIELD CONNECTORS & SPLITTERS


SNAP CONNECTOR INSTRUCTIONS—FOR PJ, PL, PH SERIES ONLY

POWER FEED CONNECTORS

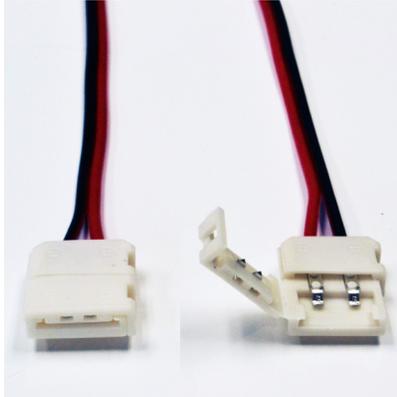


STEP 1

- Carefully release the latch on the side of connector and open the door.

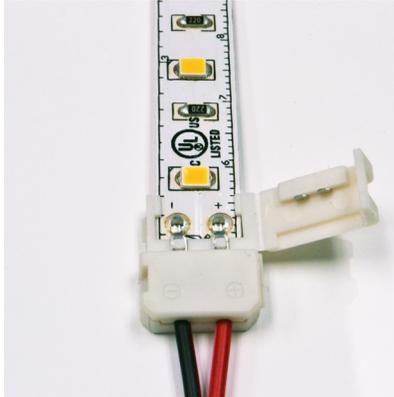

STEP 2

- Match the tape polarity with the connector polarity. Slide the LED tape under the grooves in the snap connector until the tape contacts are beneath the connector contacts as shown.

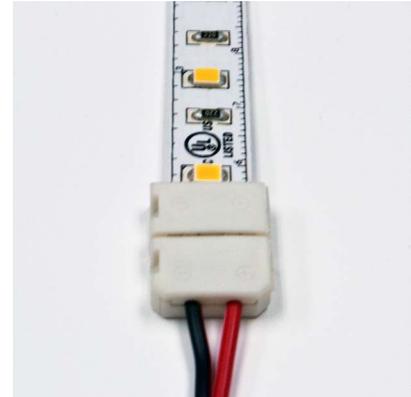

STEP 3


- Close the snap connector door. The latch on the side should click shut. Make sure the latch is fully seated in the closed position.

STRAIGHT COUPLERS




STEP 1

- Carefully release the latches on both sides of the connector as shown.

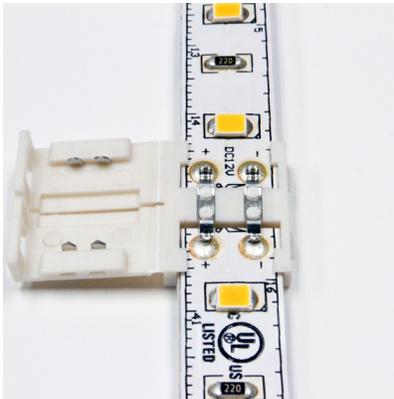

STEP 2

- Ensure that polarity on the LED tape is the same on both sides of the coupler. Slide the LED tape under the grooves in the snap connector until the tape contacts are beneath the connector contacts as shown.

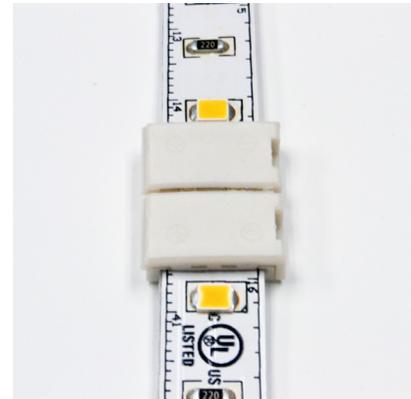

STEP 3

- Close the snap connector doors. The latches on the side should click shut. Make sure the latches are fully seated in the closed position.