




JAGGER™ (INDOOR)

J-SERIES | CORNER BENDING | LINEAR LED LIGHTING

Fixture Type: _____

Project: _____

Location: _____

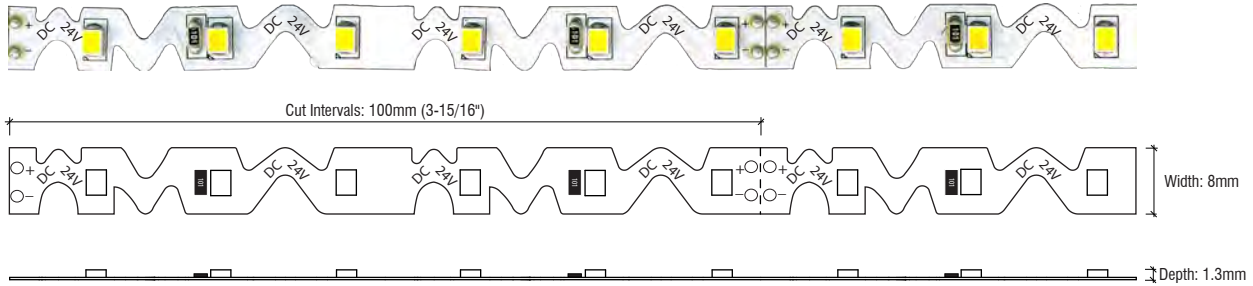

MODEL:	J27K-24V	J3K-24V	J35K-24V	J41K-24V	J5K-24V
Kelvin	2700K	3000K	3500K	4100K	5000K
Lumens	161 lm/ft	165 lm/ft	170 lm/ft	174 lm/ft	178 lm/ft
Rating	IP54	IP54	IP54	IP54	IP54

PRODUCT FEATURES

- Ideal for curved lighting applications
- Dimmable
- 50,000 hour life
- 5-year warranty
- UL-listed for indoor use
- 3M™ industrial adhesive backing
- For use with 24V power supplies

SPECIFICATIONS

Series	J - Jagger™ (Indoor)
Input Voltage	24V DC / Constant Voltage
Watts per Foot	1.4W/ft @ Maximum Run Length
Beam Spread	120°
Max Run Length	Unlimited, power every 20ft
Cut Intervals	3-15/16" (100mm)
Dimensions	5/16" (8mm) x 1/16" (1.3mm)
CRI	90
Diode	Epistar 2835
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)

KELVIN COLOR TEMPERATURE SCALE



TOTAL WATTAGE USED AT EACH LENGTH

1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft	9ft	10ft	11ft	12ft	13ft	14ft	15ft	16ft	17ft	18ft	19ft	20ft
1.8	3.6	5.4	7.1	8.8	10.5	12.1	13.6	15.1	16.5	18.3	19.6	20.9	22.1	23.2	24.2	25.2	26.1	26.9	27.8

Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.0

