



MODULIGHT™ (INDOOR)

ML2X-SERIES | LED FIXTURE

Fixture Type: _____

Project: _____

Location: _____

PRODUCT FEATURES


- 120V Input Voltage
- Linkable up to 200W
- Dimmable
- 50,000 hour life
- ETL-Listed for indoor use
- No diode imaging
- Curved lens provides 180° beam



SPECIFICATIONS

MODEL:	ML2X-1	ML2X-2	ML2X-3	ML2X-4
Input Voltage	120V AC	120V AC	120V AC	120V AC
Wattage	8W	15W	25W	30W
Lumens @ 3000K	648	1215	2025	2430
Lumens @ 4000K	720	1350	2250	2700
CRI	84	84	84	84
Diodes (SMD3014)	72	140	240	328
Length	11"	21.75"	34.25"	45.25"
Height	1.5"	1.5"	1.5"	1.5"
Width	1.75"	1.75"	1.75"	1.75"

DIMENSIONS

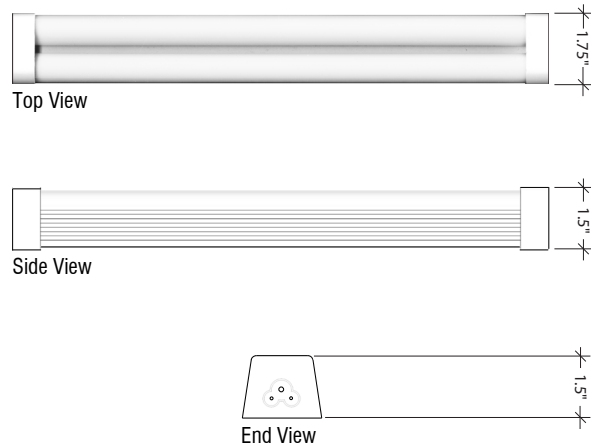


ORDERING INFORMATION

Example: **ML2X-2-3K**

Series	Length	Kelvin
ML2X		
ML2X	1—1ft 2—2ft 3—3ft 4—4ft	3K—3000K 4K—4000K

KELVIN COLOR TEMPERATURE SCALE

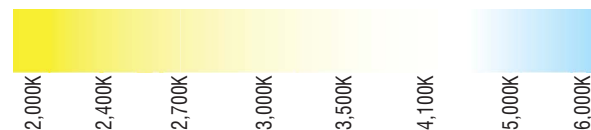



MODULIGHT™


LED ACCESSORIES

Fixture Type: _____

Project: _____

Location: _____

**STRAIGHT COUPLER
(included)**

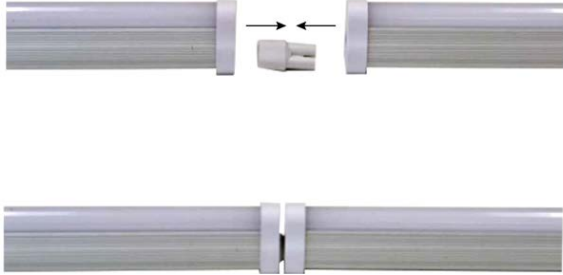

**8" JUMP COUPLER*
(included)**




8" coupler

*1m (39.37") optional SKU# MLX-LNK-1M

**MOUNTING CLIPS
(included)**



**HARDWIRE POWER FEED
(included)**

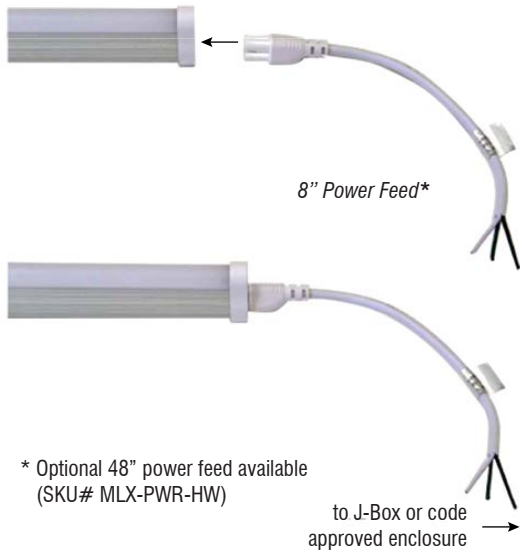


8" Power Feed*

* Optional 48" power feed available
(SKU# MLX-PWR-HW)

to J-Box or code
approved enclosure →

**OPTIONAL PLUG-IN POWER CORD
(SKU# MLX-PWR-PLG)**

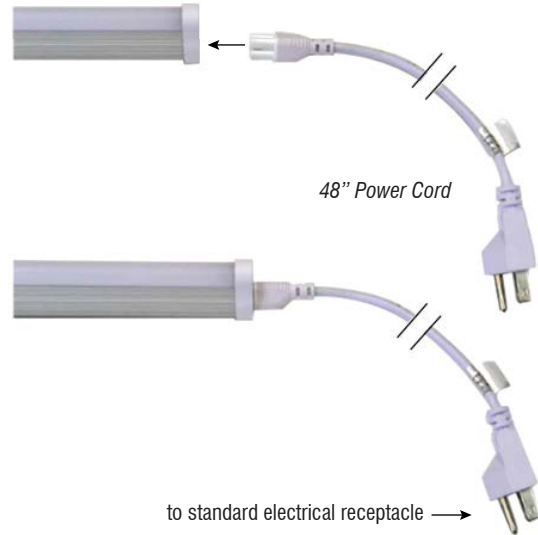

48" Power Cord

to standard electrical receptacle →