



SIDE EMITTING (INDOOR)

SE-SERIES | LINEAR LED LIGHTING


Fixture Type: _____

Project: _____

Location: _____



Cut Intervals: 50mm (1-15/16")



Width: 5mm



Depth: 1.3mm

MODEL:	SE27K-24V	SE3K-24V	SE35K-24V	SE41K-24V	SE5K-24V
Kelvin	2700K	3000K	3500K	4100K	5000K
Lumens	131 lm/ft	135 lm/ft	140 lm/ft	147 lm/ft	156 lm/ft


PRODUCT FEATURES

- Side emitting diode
- Dimmable
- 5-year warranty
- 50,000 hour life
- UL-listed for indoor
- 3M™ industrial adhesive backing
- For use with 24V power supplies

SPECIFICATIONS

Series	SE - Side Emitting (Indoor)
Input Voltage	24V DC / Constant Voltage
Watts per Foot	1.9W/ft @ Maximum Run Length
Beam Spread	120°
Max Run Length	Unlimited, power every 20ft
Cut Intervals	1-15/16" (50mm)
Dimensions	3/16" (5mm) x 1/16" (1.3mm)
CRI	84
Diode	Epistar 4008
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)

KELVIN COLOR TEMPERATURE SCALE

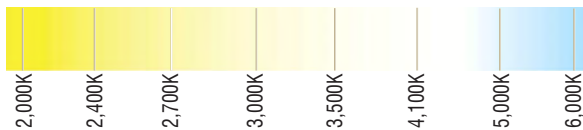

TOTAL WATTAGE USED AT EACH LENGTH

1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft	9ft	10ft	11ft	12ft	13ft	14ft	15ft	16ft	17ft	18ft	19ft	20ft
3.5	6.5	9.5	12.2	14.8	17.8	20	22.4	24.2	26.5	28.3	29.4	30.7	32.1	33.4	34.4	35.3	36.3	37.3	37.6

Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.0

