




# SUNSET STRIP (OUTDOOR)

SS-SERIES | RUBBER COATED | LINEAR LED


Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_



Cut Intervals: 1.938" (33.3mm)



Width: 0.438"  
11.2mm  
(0.5" (12.2mm) end cap)



Depth: 0.25"  
6mm  
(0.375" (9mm) end cap)


## PRODUCT FEATURES

- Warm, Soft Lighting Ideal for Vintage Aesthetics
- 90+ CRI
- Dimmable
- 50,000 Hour Life
- 5-Year Warranty
- UL-Listed for Indoor and Outdoor Use
- 3M™ Industrial Adhesive Backing
- For Use With 24V Power Supplies

## SPECIFICATIONS

Model	SS18K-WR-24V (Outdoor)
Input Voltage	24V DC / Constant Voltage
Watts per Foot	3.2W/ft @ Maximum Run Length
Beam Spread	120°
Max Run Length	Unlimited, power every 30ft
Production Intervals	1.938" (33.3mm)
End Cap Dimensions	0.5" (12.2mm) × 0.375" (9mm)
Tape Dimensions	0.438" (11.2mm) × 0.25"(6mm)
Lumens	210 lm/ft
CRI	1800K = 90+
Diode	2835
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)
Rating	IP67

## KELVIN COLOR TEMPERATURE SCALE

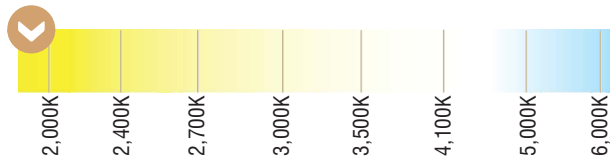

## TOTAL WATTAGE USED AT EACH LENGTH

1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft	9ft	10ft	11ft	12ft	13ft	14ft	15ft
4.2	8.5	12.7	16.8	21	25.4	29.2	32.9	36.9	40.5	44.2	48	51.4	54.6	57.7
16ft	17ft	18ft	19ft	20ft	21ft	22ft	23ft	24ft	25ft	26ft	27ft	28ft	29ft	30ft
60.7	64.3	67	70.4	71.8	75.2	77.7	80	83	85.1	86.6	88.7	91.2	93.7	94.6

Conforms to ANSI/UL Standard 2108  
Certified to CAN/CSA Standard C22.2 No. 250.0

