



# THIN LINE (INDOOR)

TL-SERIES | LINEAR LED LIGHTING


Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_



Cut Intervals: 38.7mm (1-1/2")



MODEL:	TL27K-24V	TL30K-24V	TL35K-24V	TL40K-24V	TL50K-24V
<b>Kelvin</b>	2700K	3000K	3500K	4000K	5000K
<b>Lumens</b>	229 lm/ft	250 lm/ft	266 lm/ft	278 lm/ft	290 lm/ft


## PRODUCT FEATURES

- Dimmable
- 50,000 hour life
- 5-year warranty
- UL-listed for indoor use
- 3M Industrial adhesive backing
- For use with 24V power supplies

## SPECIFICATIONS

Series	TL - Thinline (Indoor)
Input Voltage	24V DC / Constant Voltage
Watts per Foot	2.6W/ft @ Maximum Run Length
Beam Spread	175°
Max Run Length	Unlimited, power every 12ft
Cut Intervals	1-1/2" (38.7mm)
Dimensions	3/16" (5mm) x 1/16" (1.5mm)
CRI	90+
Diode	1207
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)

## KELVIN COLOR TEMPERATURE SCALE

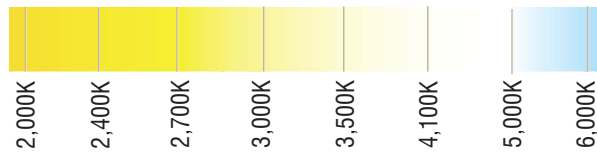

## TOTAL WATTAGE USED AT EACH LENGTH

1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft	9ft	10ft	11ft	12ft	13ft	14ft	15ft
2.8	5.6	8.3	10.8	13.4	15.5	17.8	19.3	21.5	25.0	26.5	31.3	N/A	N/A	N/A

Conforms to ANSI/UL Standard 2108  
 Certified to CAN/CSA Standard C22.2 No. 250.0

