




# VERTEX™ 1000 (OUTDOOR)

VT-SERIES | RUBBER COATED | LINEAR LED LIGHTING

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

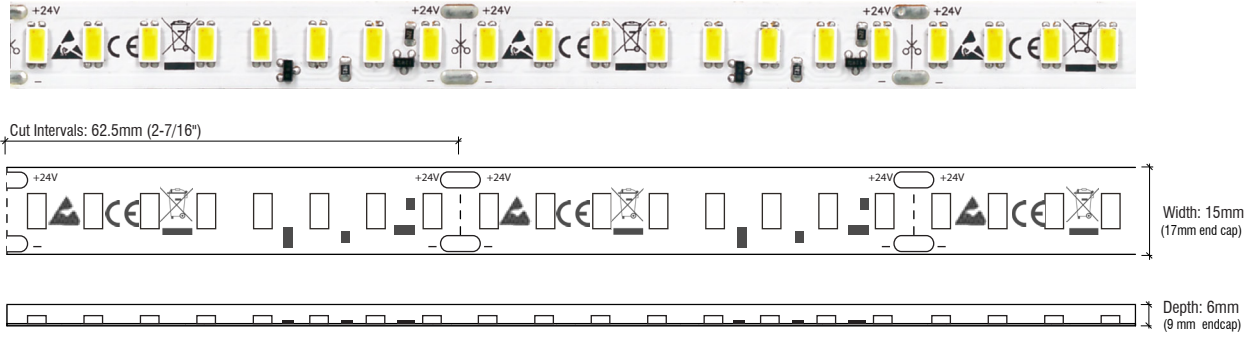

MODEL:	VT27K-WR-24V	VT3K-WR-24V	VT35K-WR-24V	VT41K-WR-24V	VT5K-WR-24V
<b>Kelvin</b>	2700K	3000K	3500K	4100K	5000K
<b>Lumens</b>	966 lm/ft	1000 lm/ft	1020 lm/ft	1041 lm/ft	1065 lm/ft
<b>Rating</b>	IP67	IP67	IP67	IP67	IP67

## PRODUCT FEATURES

- 1000 lumens per foot
- Dimmable
- 50,000 hour life
- 5-year warranty
- UL-listed for indoor and outdoor use
- 3M™ Industrial adhesive backing
- For use with 24V power supplies

## SPECIFICATIONS

Series	VT - Vertex™ 1000 (Outdoor)
Input Voltage	24VDC / Constant Voltage
Watts per Foot	6.7W/ft @ Maximum Run Length
Beam Spread	120°
Max Run Length	Unlimited, power every 14ft
Cut Intervals	2-7/16" (62.5mm)
End Cap Dimensions	11/16" (17mm) x 3/8" (9mm)
Tape Dimensions	9/16" (15mm) x 1/4" (6mm)
CRI	85+
Diode	5630
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)

## KELVIN COLOR TEMPERATURE SCALE



## TOTAL WATTAGE USED AT EACH LENGTH

1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft	9ft	10ft	11ft	12ft	13ft	14ft
6.7	13.4	20.1	26.8	33.4	40.1	46.8	53.5	60.2	66.9	73.5	80.3	86.9	93.6

Conforms to ANSI/UL Standard 2108  
 Certified to CAN/CSA Standard C22.2 No. 250.0

