




COLOR CHANGING + TUNING (OUTDOOR)

RGBWA-SERIES | COLOR TUNING | RUBBER COATED
LINEAR LED LIGHTING

Fixture Type: _____

Project: _____

Location: _____

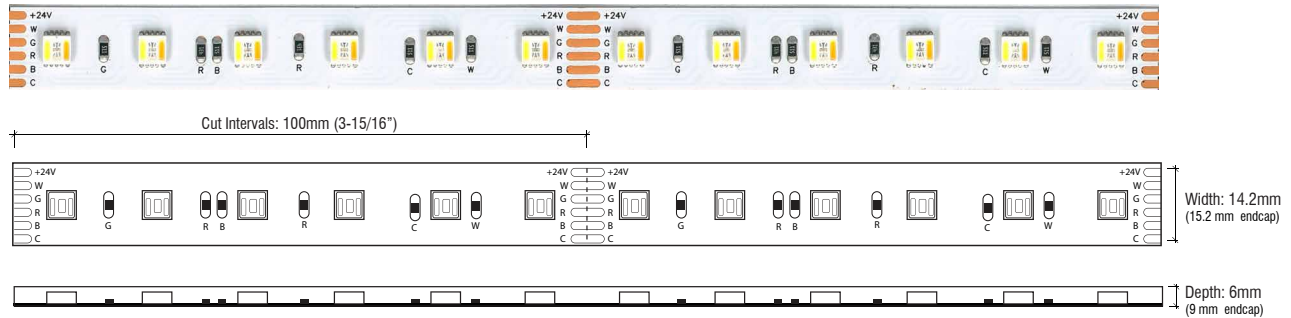

PRODUCT FEATURES

- Ability to mix Kelvin temperatures
- 90+ CRI
- Dimmable
- 50,000 hour life
- 5-year warranty
- UL-listed for indoor and outdoor use
- 3M™ industrial adhesive backing
- For use with electronic power supplies


SPECIFICATIONS

Model	RGBWA-WR-24V (Outdoor)
Input Voltage	24V DC / Constant Voltage
Beam Spread	120°
Max Run Length	Unlimited, power every 25ft
Cut Intervals	3-15/16" (100mm)
End Cap Dimensions	19/32" (15.2mm) x 3/8" (9mm)
Tape Dimensions	9/16" (14.2mm) x 1/4" (6mm)
Average Watts	4 W/ft
Lumens	340 max. lm/ft
CRI	3000K = 90+
Diode	Epistar 5050
Dimming Options	RF, WiFi, DMX
Temp Range	-40°F (-40°C) to 149°F (65°C)
Rating	IP67

RGB COLOR SPECTRUM



KELVIN COLOR TEMPERATURE SCALE

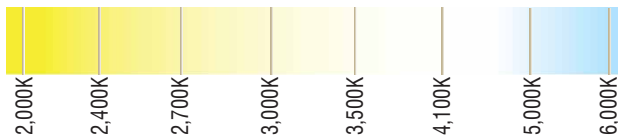

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.0

