




# COLOR CHANGING + TUNING (OUTDOOR)

RGBWA-SERIES | COLOR TUNING | RUBBER COATED  
LINEAR LED LIGHTING

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

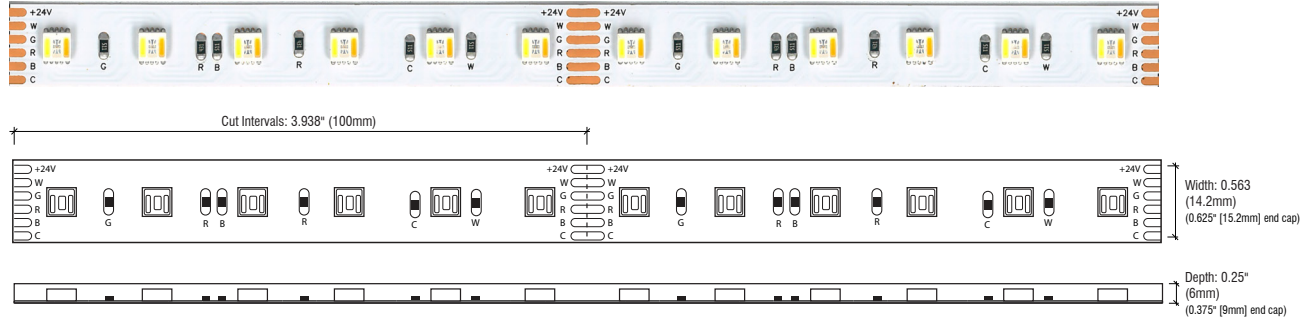

## PRODUCT FEATURES

- Ability to mix Kelvin temperatures
- 90+ CRI
- Dimmable
- 50,000 hour life
- 5-year warranty
- UL-listed for indoor and outdoor use
- 3M™ industrial adhesive backing
- For use with electronic power supplies


## SPECIFICATIONS

|                      |                                |
|----------------------|--------------------------------|
| Model                | RGBWA-WR-24V (Outdoor)         |
| Input Voltage        | 24V DC / Constant Voltage      |
| Beam Spread          | 120°                           |
| Max Run Length       | Unlimited, power every 25ft    |
| Production Intervals | 3.938" (100mm)                 |
| End Cap Dimensions   | 0.625" (15.2mm) × 0.375" (9mm) |
| Tape Dimensions      | 0.563" (14.2mm) × 0.25" (6mm)  |
| Average Watts        | 4 W/ft                         |
| Lumens               | 340 max. lm/ft                 |
| CRI                  | 3000K = 90+                    |
| Diode                | Epistar 5050                   |
| Dimming Options      | RF, WiFi, DMX                  |
| Temp Range           | -40°F (-40°C) to 149°F (65°C)  |
| Rating               | IP67                           |

## RGB COLOR SPECTRUM



## KELVIN COLOR TEMPERATURE SCALE

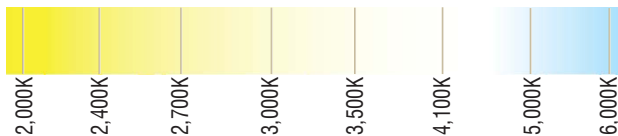

Conforms to ANSI/UL Standard 2108  
Certified to CAN/CSA Standard C22.2 No. 250.0

