DIM TO WARM (INDOOR)

DW-SERIES | LINEAR LED LIGHTING

Fixture Type: _____

Project: _____

Location: _____

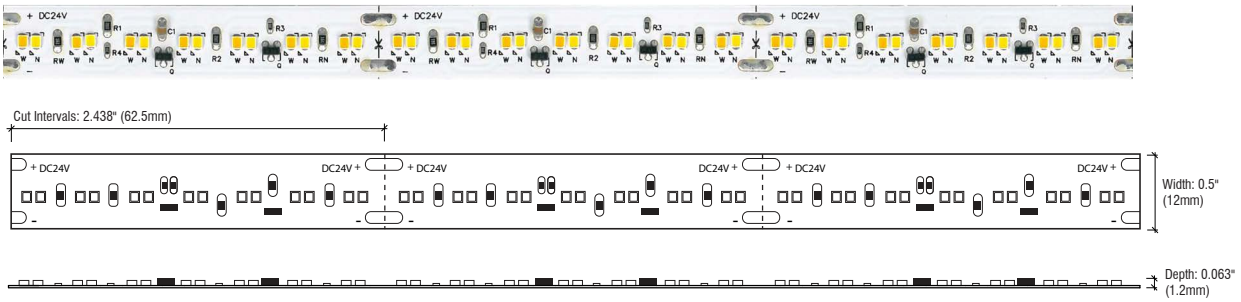

PRODUCT FEATURES

- 90+ CRI
- Dimmable
- 50,000 Hour Life
- 5-Year Warranty
- UL-Listed for Indoor
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies
- Outdoor Product (IP67) Available

SPECIFICATIONS

Model	DW1830-24V (Indoor)
Input Voltage	24V DC / Constant Voltage
Watts per Foot	3.6W/ft @ Maximum Run Length
Kelvin Range	1800K–3000K
Lumens	307 lm/ft
Beam Spread	120°
Max Run Length	Unlimited, power every 20ft
Cut Intervals	2.438" (62.5mm)
Dimensions	0.5" (12mm) × 0.063" (1.2mm)
CRI	90+
Diode	2016
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)

DIMMING CURVE

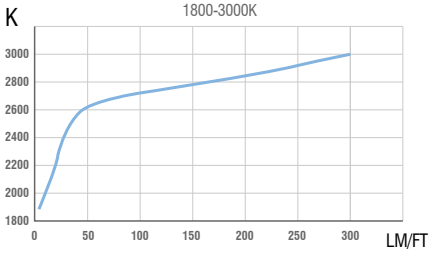

TOTAL WATTAGE USED AT EACH LENGTH

1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft	9ft	10ft	11ft	12ft	13ft	14ft	15ft	16ft	17ft	18ft	19ft	20ft
4.2	8.5	12.7	16.8	21	25.4	29.2	32.9	36.9	40.5	44.2	48	51.4	54.6	57.7	60.7	64.3	67	70.4	71.8

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.0

Supports TITLE 24 JA8-2016 Compliance | RoHS COMPLIANT | c UL us LISTED | Field Cuttable | 24V DC | DRY LOCATION RATED