









# FLEXFIT™ INSTALLATION INSTRUCTIONS

- ① Prepare mounting surface by removing any dirt, debris, or moisture.

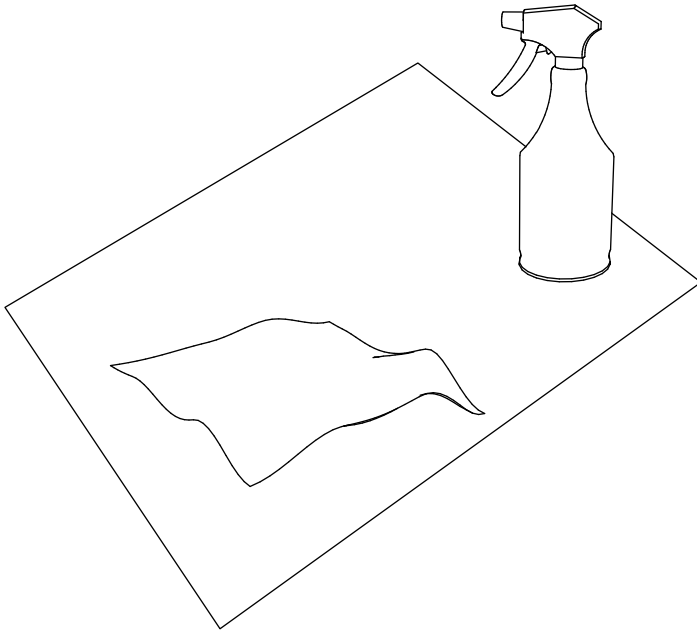


- ② If necessary, using a sharp tool, cut LED panel to desired length at indicated cut intervals.

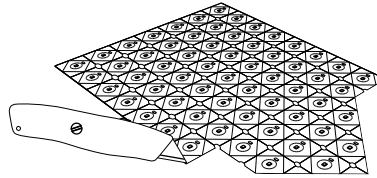


⚠ Any shapes that require a diagonal cutting pattern must be a minimum of 2 units wide to maintain electrical continuity.


- ③ Ensure that FlexFit is correctly oriented with power feed end toward power source.

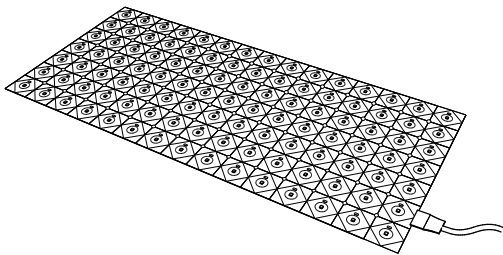

- ④ Peel off 3M™ adhesive backing and adhere FlexFit to smooth, clean, non-porous mounting surface only!

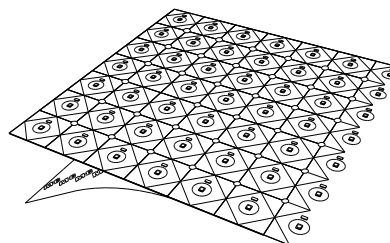

Optional Mounting:  
Use screw holes - available at every diode intersection

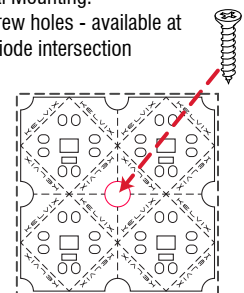








---
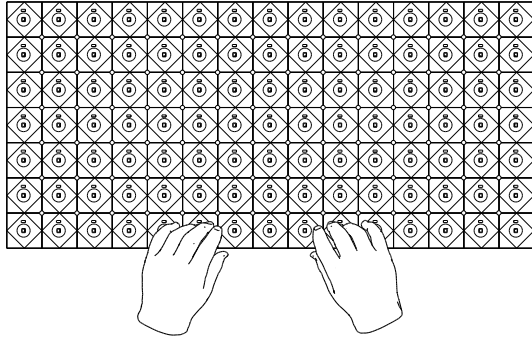
## FLEXFIT™ INSTALLATION INSTRUCTIONS

- ⑤ Gently press down along entire panel to remove any air pockets and secure into position.



- 
-  Do not power on LED panel until all adhesive backing paper has been removed.
  -  Do not fold, crease, twist, or bend LED panel at sharp angles.
  -  Refer to FlexFit Spec Sheet to ensure multiple connected panels are suitable for power supply.
  -  Cutting FlexFit with a dull tool may cause the panel to short when powered.