



SLINX™ (INDOOR/OUTDOOR)


HORIZONTAL BENDING LINEAR LED

RUBBER COATED | OUTDOOR-RATED

Fixture Type: _____

Project: _____

Location: _____

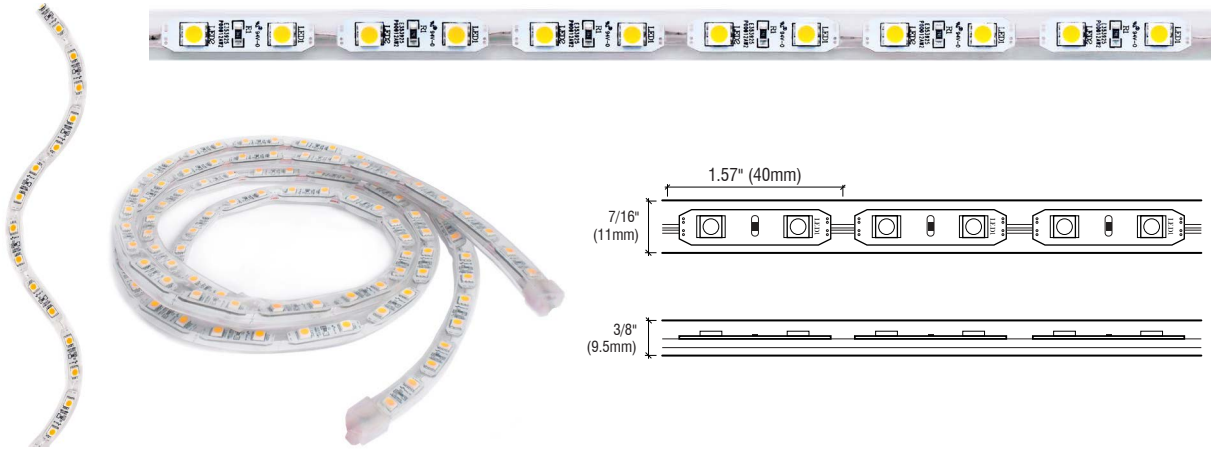


MODEL:	SX24K-WR-24V	SX27K-WR-24V	SX3K-WR-24V	SX35K-WR-24V	SX4K-WR-24V
Kelvin	2400K	2700K	3000K	3500K	4000K
Lumens/ft	320	336	352	369	387
Rating	IP66	IP66	IP66	IP66	IP66

PRODUCT FEATURES

- Horizontal Bending
- Clip or Channel Mounting (Required, See Page 2)
- 50,000 Hour Life
- Dimmable
- 90+ CRI
- UL-listed for Indoor and Outdoor Use
- For Use with 24V Power Supplies

SPECIFICATIONS

Series	SX - Slinx (Indoor/Outdoor)
Input Voltage	24V DC / Constant Voltage
Beam Spread	120°
Max Run Length	Unlimited, power feed every 25 feet
Dimensions	7/16" (11mm) × 3/8" (9.5mm)
CRI	90
Watts/ft	2.9
Diode	5050
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)
Rating	IP66

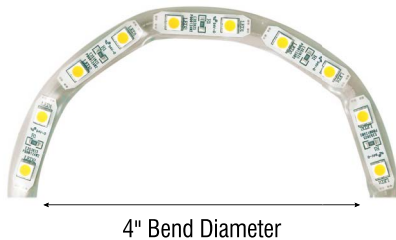

Note: not field cuttable. Please specify exact length to be factory produced. See next page for required mounting components.

Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.0





SLINX™ MOUNTING OPTIONS*

REQUIRED FOR SLINX


Fixture Type: _____

Project: _____

Location: _____

SX-CLP-AL

11/16 inch aluminum mounting clip. (Recommend 2 per foot.)

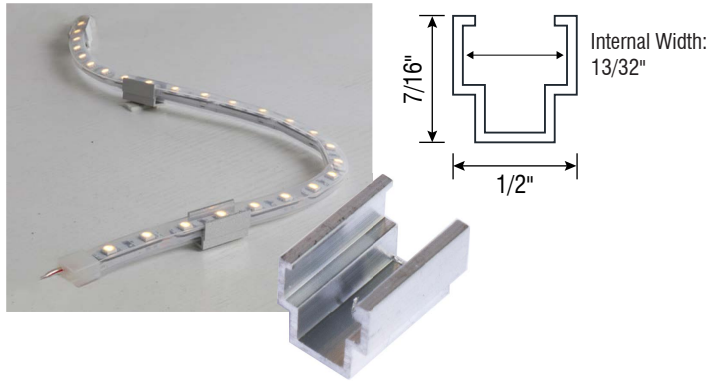


SPECIFICATIONS

Model	SX-CLP-AL
Material	Aluminum
Length	17.3mm (11/16")
Width	12.6mm (1/2")
Height	11.9mm (7/16")
Internal Width	10.6mm (13/32")

SX-CH-AL-1M

2-meter aluminum mounting channel.

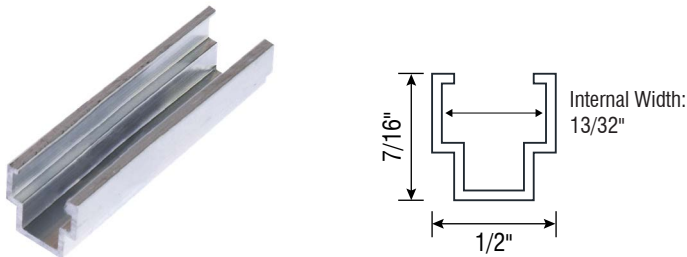

SPECIFICATIONS

Model	SX-CH-AL-1M
Material	Aluminum
Length	1m (39-3/8")
Width	12.6mm (1/2")
Height	11.9mm (7/16")
Internal Width	10.6mm (13/32")

*Must specify a mounting option. Slinx can be mounted with clips and/or mounting channel.