



SLINX™ (INDOOR/OUTDOOR)


HORIZONTAL BENDING LINEAR LED

RUBBER COATED | OUTDOOR-RATED

Fixture Type: _____

Project: _____

Location: _____

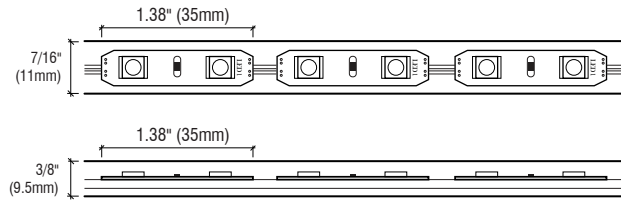

Note: not field cuttable. Please specify exact length to be factory produced.

MODEL:	SX24K-WR-24V	SX27K-WR-24V	SX3K-WR-24V	SX35K-WR-24V	SX4K-WR-24V
Kelvin	2400K	2700K	3000K	3500K	4000K
Lumens	320 lm/ft	336 lm/ft	352 lm/ft	369 lm/ft	387 lm/ft
Rating	IP66	IP66	IP66	IP66	IP66

PRODUCT FEATURES

- Can be cut into any shape
- Horizontal Bending
- Clip or channel attachment
- 50,000 hour life
- Dimmable
- 90+ CRI
- UL-listed for indoor and outdoor use
- For use with 24V power supplies

SPECIFICATIONS

Series	SX - Slinx™ (Indoor/Outdoor)
Input Voltage	24V DC / Constant Voltage
Beam Spread	120°
Max Run Length	Unlimited, power feed every 25 feet
Dimensions	7/16" (11mm) × 3/8" (9.5mm)
CRI	90
Wattage	2.9W/ft
Diode	5050
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)
Rating	IP66



4" Max Bend Diameter

Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.0

