




TETRIX™

OUTDOOR LED BACKLIGHT PANELS

Fixture Type: _____


Project: _____

Location: _____

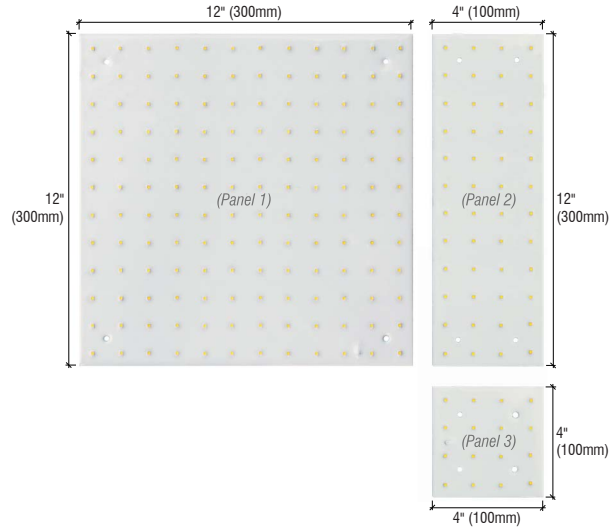

PRODUCT FEATURES

- 50,000 hour life
- UL-listed for indoor and outdoor use
- Connect up to 8 square feet together
- 6ft wire lead pre-attached to all panels
- Mount with screws or adhesive tape
- For use with 24 volt power supply



Note: Place Tetrix™ panels a minimum of 1.4" (36mm) from surface for proper diffusion.


SPECIFICATIONS

Input Voltage	24V DC / Constant Voltage
Beam Spread	120°
Max Connection	96W per power feed
CRI	90+
Diode	Epistar 2835
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)
IP Rating	IP65

ORDERING INFORMATION

Panel	Size	Watts	Lumens
1	12"×12"	11W	1125 lm
2	12"×4"	3.5W	394 lm
3	4"×4"	1.25W	132 lm

Example: **T-2-3K-24V**

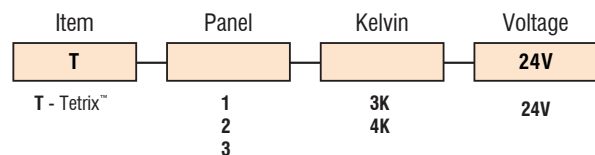

Conforms to ANSI/UL Standard 2108
 Certified to CAN/CSA Standard C22.2 No. 250.0

