



DIRECT VIEW 200 (OUTDOOR)

DL-SERIES | RUBBER COATED | LINEAR LED LIGHTING


Fixture Type: _____

Project: _____

Location: _____



Cut Intervals: 1" (25mm)



Width: 0.5"
(13.2mm)
(0.563" [14.2mm] end cap)



Depth: 0.25"
(6mm)
(0.375" [9mm] end cap)

MODEL:	DL27K-WR-24V	DL30K-WR-24V	DL35K-WR-24V	DL40K-WR-24V	DL50K-WR-24V
Kelvin	2700K	3000K	3500K	4100K	5000K
Lumens	189 lm/ft	195 lm/ft	205 lm/ft	220 lm/ft	237 lm/ft
Rating	IP67	IP67	IP67	IP67	IP67


PRODUCT FEATURES

- Suitable for most direct view applications
- 90+ CRI
- Dimmable
- 50,000 hour life
- 5-year warranty
- UL-listed for indoor and outdoor use
- 3M™ Industrial adhesive backing
- For use with 24V power supplies

SPECIFICATIONS

Series	DL - Direct View 200 (Outdoor)
Input Voltage	24VDC / Constant Voltage
Watts per Foot	1.6W/ft @ Maximum Run Length
Beam Spread	120°
Max Run Length	Unlimited, power every 20ft
Cut Intervals	1" (25mm)
End Cap Dimensions	0.563" (14.2mm) × 0.375" (9mm)
Tape Dimensions	0.5" (13.2mm) × 0.25" (6mm)
CRI	90+
Diode	2016
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)

KELVIN COLOR TEMPERATURE SCALE

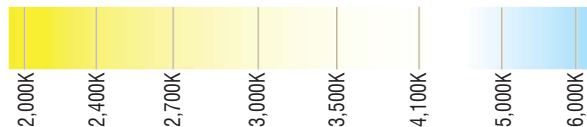

TOTAL WATTAGE USED AT EACH LENGTH

1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft	9ft	10ft	11ft	12ft	13ft	14ft	15ft	16ft	17ft	18ft	19ft	20ft
2.2	4.3	6.4	8.5	10.6	12.7	14.7	16.3	18.1	19.8	21.4	22.9	24.3	25.6	26.8	27.9	28.9	29.8	30.6	31.3

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.0

