



Z5—ZOLO™ 5

SLIM INDOOR/OUTDOOR LED WASHER/GRAZER


Fixture Type: _____

Project: _____

Location: _____

PRODUCT FEATURES

- High Purity Tempered Glass
- 6063 High Density Extruded Aluminum Alloy
- Available in Titanium Gray, Black or White Finish
- Remote Driver for Excellent Reliability (Sold Separately)
- CRI > 90, 3 Steps
- 24VDC
- Linkable
- IP66

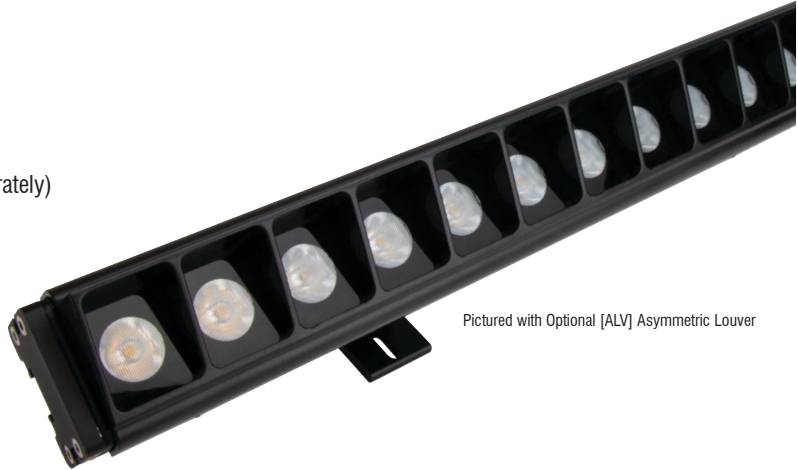


Pictured with Optional [ALV] Asymmetric Louver

SPECIFICATIONS

Input Voltage	24VDC / Constant Voltage
Watts per Foot	8W (Standard Output); Custom Wattages Available
Lumen per Watt	100 lm/W
Beam Spread	20° × 40°, 15°, 30°, 60°
Max Run Length	Up to 96W per Power Feed
Dimensions	1.3" (33mm) × 1.1" (27mm) × Variable (see below)
CRI	90
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 122°F (50°C)

FINISHES

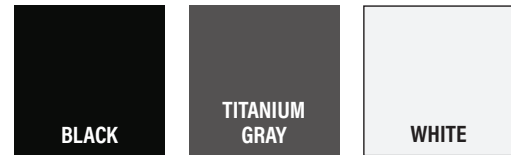

ORDERING INFORMATION

Example: Z5-2-8W-30K-2040-S2-TG-NA

Item	Length	Output	Kelvin	Beam Angle	Stand-off Length	Finish	Accessory
Z5	2	8W	30K	2040	S2	TG	NA
Zolo-5	1—1ft 2—2ft 3—3ft 4—4ft	8W—8W/ft <i>*Custom wattages available</i>	30K—3000K 35K—3500K 40K—4000K	2040—20°×40° 15—15° 30—30° 60—60°	S2—2" S4—4"	TG—Titanium Gray BK—Black WH—White	NA—None LV—Louver ALV—Asymmetric Louver GS—Solid Glare Shield

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.0





Z5—ZOLO™ 5

SLIM INDOOR/OUTDOOR LED WASHER/GRAZER

Fixture Type: _____

Project: _____

Location: _____

