




# SIDE EMITTING (INDOOR)

SE-SERIES | LINEAR LED LIGHTING

Fixture Type: \_\_\_\_\_


Project: \_\_\_\_\_

Location: \_\_\_\_\_

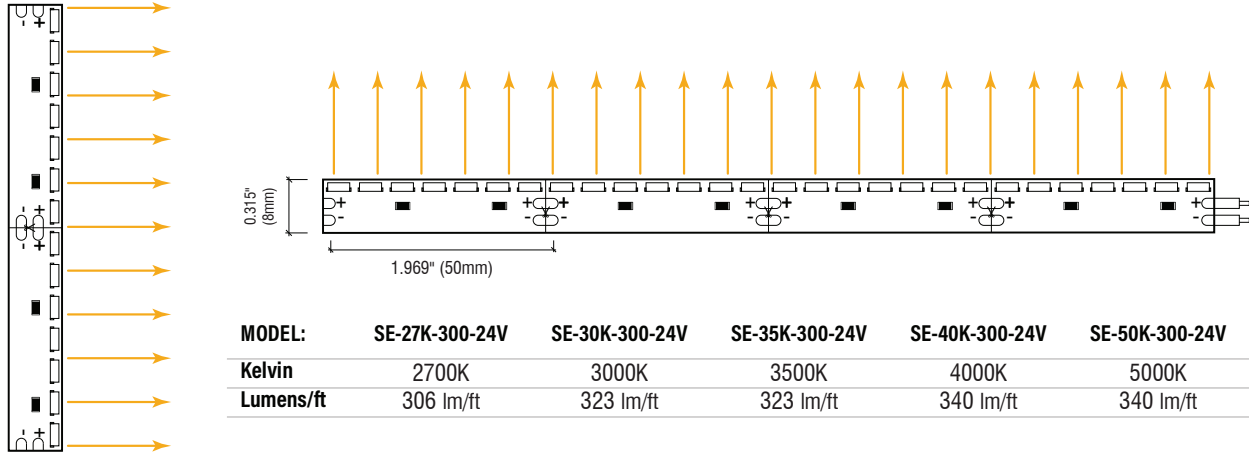

## PRODUCT FEATURES

- Side Emitting Diode
- Up To 3/4" Bend Diameter
- Dimmable
- 5-year Warranty
- 50,000 Hour Life
- UL-listed for Indoor
- 3M™ Industrial Adhesive Backing
- For Use with 24V Power Supplies

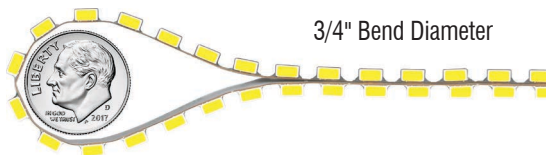

## SPECIFICATIONS

Series	SE—Side Emitting (Indoor)
Input Voltage	24V DC / Constant Voltage
Watts per Foot	2.2W/ft @ Max Run Length
Beam Spread	120°
Max Run Length	Unlimited, power every 20ft
Cut Intervals	1.969" (50mm)
Dimensions	0.315" (8mm) × 0.094" (2.4mm)
CRI	90+
Diode	4020
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-4°F (-20°C) to 113°F (45°C)

## TOTAL WATTAGE USED AT EACH LENGTH

1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft	9ft	10ft	11ft	12ft	13ft	14ft	15ft	16ft	17ft	18ft	19ft	20ft
3.6	6.6	9.6	12.5	15.3	18	20.6	23.1	25.6	27.9	30	32.1	34.1	35.9	37.7	39.3	40.8	42.2	43.6	44.4

Conforms to ANSI/UL Standard 2108  
 Certified to CAN/CSA Standard C22.2 No. 250.0

