



FLEXFIT™ COLOR TUNING

FLEXIBLE LED SHEET



Fixture Type: _____

Project: _____

Location: _____

PRODUCT FEATURES

- Ability to Mix Kelvin Temperatures
- Cuttable Around Every Pair of Diodes to Create Unique Shape
- Screw Mount or 3M™ Adhesive Options For Easy Installation
- 50,000 Hour Life
- UL-Listed

	FF1-CT-20	FF1-CT-30
Watts	20W	30W
Lumens	1,400 lm/ft ²	2,100 lm/ft ²


SPECIFICATIONS

Input Voltage	24V DC / Constant Voltage
Beam Spread	120°
Max Connection	96W per Power Feed
FF1 Dimensions	12" × 12" × 0.063"
FF2 Dimensions	12" × 24" × 0.063"
CRI	90
LED Count	288 per Square Foot
Dimming Options	0–10V, DMX, DALI
Temp Range	-4°F (-20°C) to 113°F (45°C)
Rating	IP20 or IP54

ORDERING INFORMATION

Example: **FF1-CT-20W-1865K-IP20-24V**

Item	Series	Wattage	CCT	IP	Voltage
FF1—FlexFit 1 × 1 FF2—FlexFit 1 × 2	CT—Color Tuning	20W—20 Watts per ft ² 30W—30 Watts per ft ²	1865K—1800-6500K	IP20—Dry IP54—Damp	24V

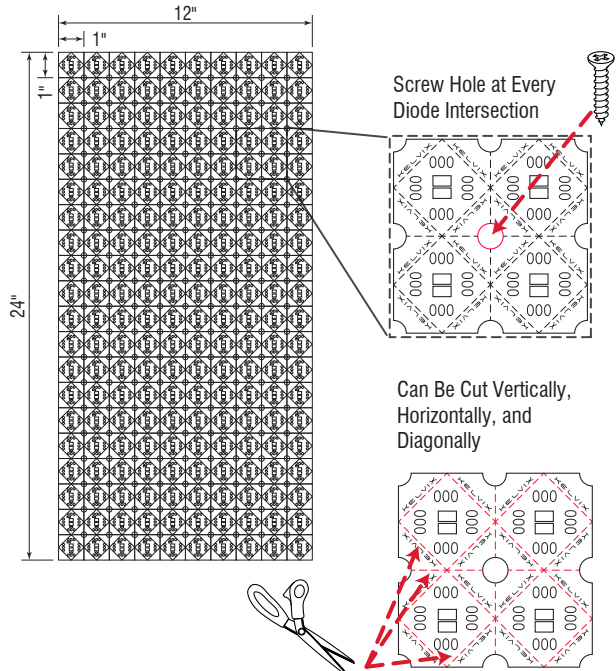

Screw Hole at Every Diode Intersection

Can Be Cut Vertically, Horizontally, and Diagonally

Note: Only Cut With a Very Sharp Tool

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.0

