



FLEXFIT™ STATIC COLOR

FLEXIBLE LED SHEET



Fixture Type: _____

Project: _____

Location: _____


PRODUCT FEATURES

- Cuttable Around Every Diode to Create Unique Shape
- Screw Mount or 3M™ Adhesive Options For Easy Installation
- 50,000 Hour Life
- UL-Listed

	2400K	2700K	3000K	3500K	4000K	5000K
5 Watts	360 lm/ft ²	375 lm/ft ²	380 lm/ft ²	390 lm/ft ²	400 lm/ft ²	410 lm/ft ²
10 Watts	700 lm/ft ²	725 lm/ft ²	750 lm/ft ²	760 lm/ft ²	775 lm/ft ²	800 lm/ft ²
15 Watts	1,000 lm/ft ²	1,050 lm/ft ²	1,100 lm/ft ²	1,110 lm/ft ²	1,150 lm/ft ²	1,200 lm/ft ²
20 Watts	1,300 lm/ft ²	1,375 lm/ft ²	1,425 lm/ft ²	1,435 lm/ft ²	1,500 lm/ft ²	1,600 lm/ft ²

SPECIFICATIONS

Input Voltage	24V DC / Constant Voltage
Beam Spread	120°
Max Connection	96W per Power Feed
FF1 Dimensions	12" × 12" × 0.063"
FF2 Dimensions	12" × 24" × 0.063"
CRI	90
LED Count	144 per Square Foot
Dimming Options	PWM, Triac, 0–10V, DMX, DALI
Temp Range	-4°F (-20°C) to 113°F (45°C)
Rating	IP20 or IP54

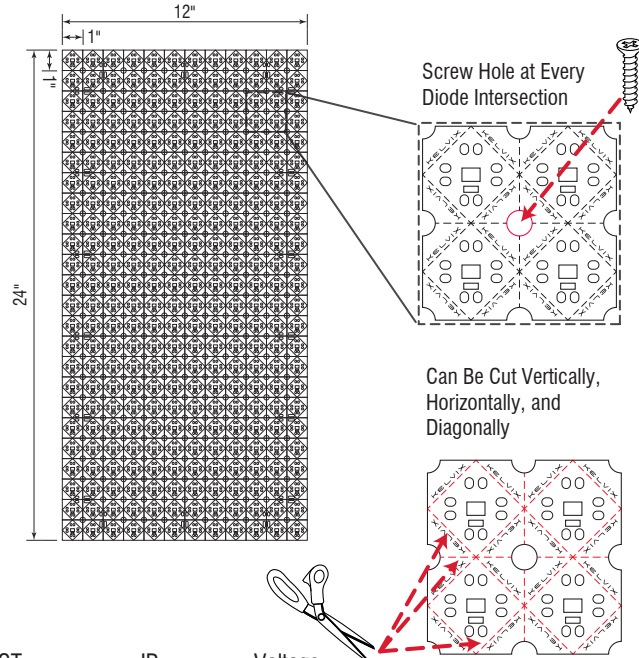

ORDERING INFORMATION

Example: **FF1-SC-5W-24K-IP20-24V**

Item	Series	Wattage	CCT	IP	Voltage
FF1—FlexFit 1 × 1 FF2—FlexFit 1 × 2	SC —Solid Color	5W —5 Watts per ft ² 10W —10 Watts per ft ² 15W —15 Watts per ft ² 20W —20 Watts per ft ²	24K —2400K 27K —2700K 30K —3000K 35K —3500K 40K —4000K 50K —5000K	IP20 —Dry IP54 —Damp	24V

Note: Only Cut With a Very Sharp Tool

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.0

