




# FLOPTIX™

## FLEXIBLE OPTICS

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_


Location: \_\_\_\_\_

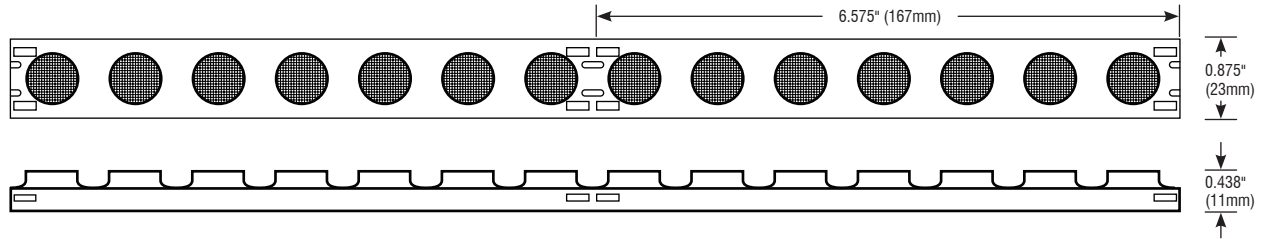

MODEL	FX-24K-650	FX-27K-650	FX-30K-650	FX-35K-650	FX-40K-650	FX-50K-650
KELVIN	2400K	2700K	3000K	3500K	4000K	5000K
LUMENS	572 lm/ft	610 lm/ft	632 lm/ft	638 lm/ft	646 lm/ft	656 lm/ft

### PRODUCT FEATURES

- Factory Built to Length
- Multiple Beam Options
- Flexible
- IP67

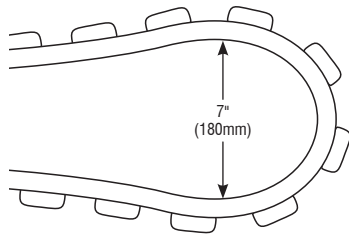

### SPECIFICATIONS

Series	FX—Floptix
Input Voltage	24 VDC
Watts per Foot	6.1W/ft
Beam Angle	20°, 30°, 40° 50°, and 20° × 40°
Max Run Length	16 ft per Power Feed
Cut Intervals	6.575" (167mm)
Bend Diameter	7" (180mm)
Tape Dimensions	0.875" (23mm) × 0.438" (11mm)
CRI	90+
Dimming Options	PWM, Triac, 0–10V, DMX, Hi-lume
Temp Range	-22°F (-40°C) to 122°F (45°C)

### ORDERING INFORMATION

Example: FX-24K-650-E-20-5FT-5.75IN

Item	CCT	Output	Feed Point	Beam Angle	Feet	Inches
<b>FX</b>		<b>650</b>			<b>_FT</b>	<b>_IN</b>
FX—Floptix	24K—2400K 27K—2700K 30K—3000K 35K—3500K 40K—4000K 50K—5000K	650—650 lm/ft	SL—Side Feed Left SR—Side Feed Right E—End Feed B—Bottom Feed	20—20° 30—30° 40—40° 50—50° 2040—20° × 40°	<b>Length</b> — Enter number of feet, followed by any remaining inches. (i.e. 5FT-5.75IN) <i>Max run length is 16ft per Power Feed.</i>	


Conforms to ANSI/UL Standard 2108  
 Certified to CAN/CSA Standard C22.2 No. 250.0





**FLOPTIX™**  
FLEXIBLE OPTICS

**FEED POINT GUIDE**

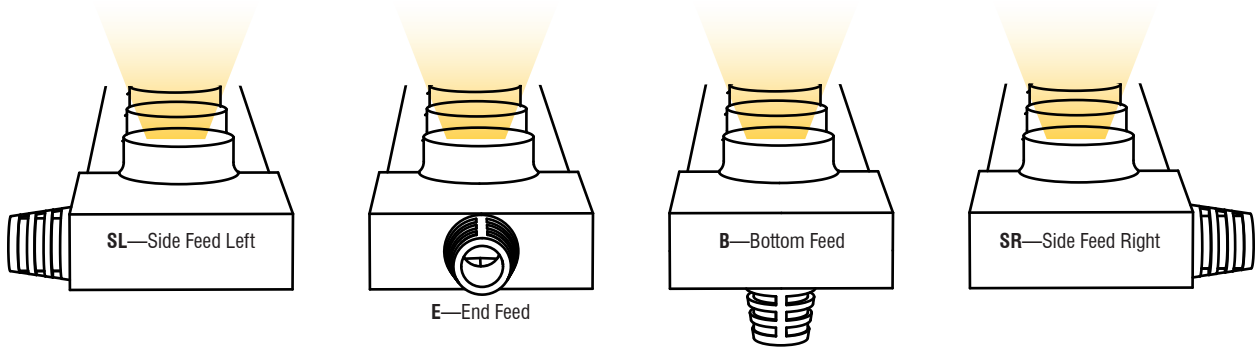


**MOUNTING CLIPS (10 PER PACK)**



**SPECIFICATIONS**

Model	FX-CM-CLP
Material	Stainless Steel
Length	0.59" (15mm)
Width	1.052" (26.72mm)
Height	0.452" (11.47mm)
Internal Width	0.997" (25.33mm)

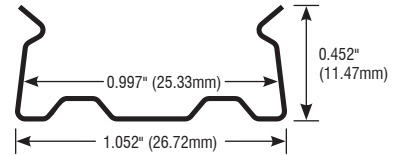

**ALUMINUM CHANNEL**



**SPECIFICATIONS**

Model	FX-CM-CH
Material	Aluminum
Length	39.37" (1m)
Width	1.181" (30mm)
Height	0.421" (10.7mm)
Internal Width	1.083" (27.5mm)

