


FIXTURE TYPE _____

PROJECT NAME _____

LOCATION _____

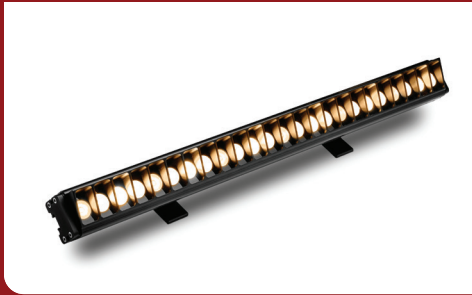

Zolo™ 7

INDOOR/OUTDOOR LED
WASHER/GRAZER



I Description

Zolo 7 is our brightest outdoor rated washer/grazer. While remaining slim, Zolo 7 offers 1100 lumens a foot! With multiple beam angles, kelvin temperatures, colors, and accessories Zolo 7 can light any project.

I Features

- High Purity Tempered Glass
- Extruded Aluminum Alloy Housing
- Available in Titanium Gray, Black, or White Finish
- Multi-Volt 24VDC Remote Driver (Sold Separately)
- Daisy Chain Multiple Fixtures
- IP66 Outdoor Rated
- Louver Options Available

I Specifications

Input Voltage	24V DC/Constant Voltage
Watts per Foot	11W/ft*
Lumen per Watt	100 lm/W
Lumen per Foot	1100 lm/ft
Beam Spread	10°×50°, 25°×40°, 15°, 30°
Max Run Length	8 ft
CRI	85*
Operating Temp.	-40°F (-40°C) to 140°F (60°C)
Storage Temp.	-22°F (-30°C) to 140°F (60°C)
Dimming Options	Non-dimmable (Consult Factory for dimmable fixtures)

I Product Code Builder

Item	Length	Power*	Temp/Color*
Z7		11W	
Z7—Zolo 7	1—12.32" (313mm) 2—23.81" (605mm) 3—35.43" (900mm) 4—46.85" (1190mm)	11W—11W/ft	27—2700K 30—3000K 35—3500K 40—4000K
Beam Angle	Mounting	Finish*	Option
1050—10°×50° 2540—25°×40° 15—15° 30—30°	S2—2" Stand Off S3—3" Stand Off CP—Mounting Clip GS—Ground Stake L3—L Bracket	TG—Titanium Gray BK—Black WH—White	NA—None LV—Louver ALV—Asymmetric Louver



Example: Z7-1-11W-27-1050-S2-TG-NA

* Customizable—Consult Factory



Dimensions

Length	12.32" (313mm), 23.81" (605mm), 35.43" (900mm), 46.85" (1190mm)
Width	1.97" (50.0mm)
Height	1.35" (34.4mm)

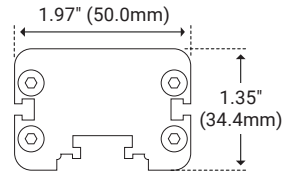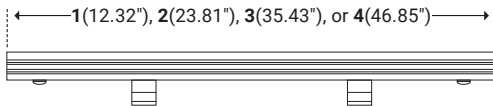


Mounting

2" Stand Off




Unit Number	Z-07-S2
Ordering Code	S2
Length	1.18" (30.0mm)
Width	2.36" (60.0mm)
Stand Off Height	1.87" (47.4mm)
Rotation	90°



3" Stand Off




Unit Number	Z-07-S3
Ordering Code	S3
Length	1.18" (30.0mm)
Width	2.36" (60.0mm)
Stand Off Height	2.63" (66.9mm)
Rotation	105°



Mounting Clip




Unit Number	Z-07-CP
Ordering Code	CP
Length	0.98" (25.0mm)
Width	1.35" (34.3mm)
Stand Off Height	0.67" (17.0mm)



Ground Stake



Unit Number	Z-07-GS
Ordering Code	GS
Diameter	ø2.05" (52.1mm)
Stand Off Height	9.64" (244.8mm)
Rotation	70°

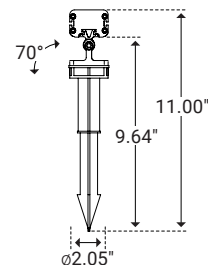




I Mounting

L Bracket



Unit Number	Z-07-L3
Ordering Code	L3
Foot Length	1.18" (30.0mm)
Foot Width	2.36" (60.0mm)
Stand Off Height	2.67" (67.9mm)




I Options

Louver




Unit Number	Z-07-LV
Ordering Code	LV
Louver Width	2.14" (54.3mm)
Louver Height	0.79" (20.0mm)
Overall Height	1.34" (33.0mm)



Asymmetric Louver



Unit Number	Z-07-ALV
Ordering Code	ALV
Louver Width	2.14" (54.3mm)
Louver Height	0.79" (20.0mm)
Overall Height	1.34" (34.0mm)



I Power & Connectors Options

Power Lead



Unit Number	Length
Z-57-FML-6	6ft
Z-57-FML-20	20ft
Z-57-FML-50	50ft



Connector



Unit Number	Length
Z-57-FMC-1	1ft
Z-57-FMC-2	2ft
Z-57-FMC-6	6ft



End Cap



Unit Number	Z-57-EC
-------------	---------

