




FLEXFIT™ RGBW

COLOR CHANGING FLEXIBLE LED SHEET

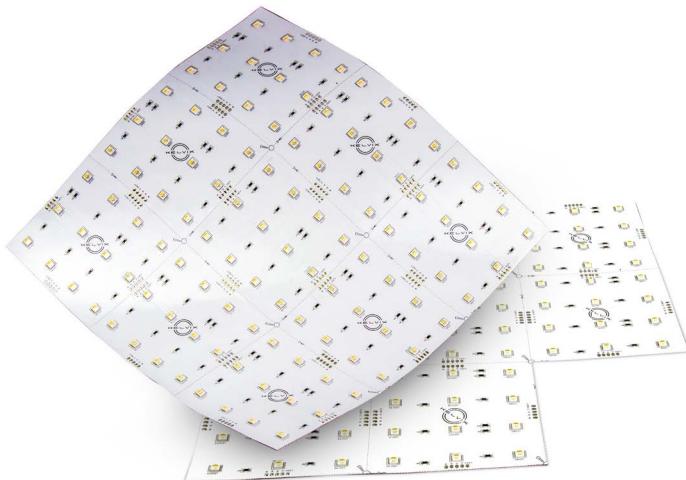



Color/CCT	WHITE (3000K)	RED	GREEN	BLUE	ALL ON
Wavelength	N/A	620–625nm	520–525nm	460–467nm	N/A
Lumens—40W/ft ²	1,460 lm/ft ²	540 lm/ft ²	1,140 lm/ft ²	260 lm/ft ²	3,400 lm/ft ²
Lumens—20W/ft ²	730 lm/ft ²	270 lm/ft ²	570 lm/ft ²	130 lm/ft ²	1,700 lm/ft ²

SPECIFICATIONS

Input Voltage	24V DC / Constant Voltage
Beam Spread	120°
Max Connection	96W per Power Feed
FF1 Dimensions	12" x 12" x 0.063"
FF2 Dimensions	12" x 24" x 0.063"
CRI	90
LED Count	108 per Square Foot
Dimming Options	0–10V, DMX, RF
Temp Range	-4°F (-20°C) to 113°F (45°C)
Rating	IP20 or IP54

ORDERING INFORMATION

Example: FF1-RGBW-40W-30K-IP20-24V

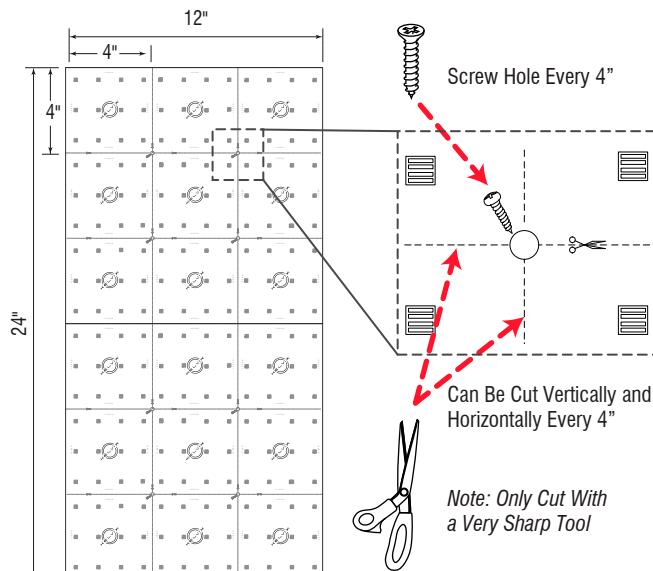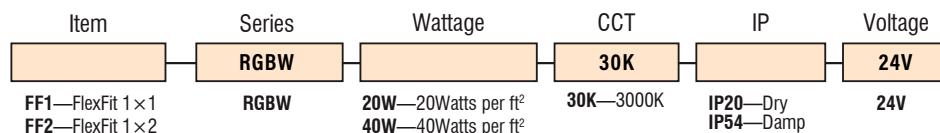

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.0

